

MMCX Female to SMA Female Adapter
RF Adapters Technical Data Sheet
MX-020

Configuration

- MMCX Female Connectr 1
- SMA Female Connectr 2
- 50 Ohms

Features

- Max VSWR of 1.20 : 1 up to 6 GHz
- MMCX Interface compliant with IEC 61169-52
- SMA Interface compliant with MIL-C-39012

Applications

- General Purpose Test


Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.20 : 1	

Mechanical Specifications
Size

Length	[mm]	19.1
Width	[mm]	9.0
Height	[mm]	8.0
Weight	[g]	3.3

MMCX Female to SMA Female Adapter
RF Adapters Technical Data Sheet
MX-020

Description	Connector 1	Connector2
Type	MMCX Female	SMA Female
Polarity	Standard	Standard
Interface Specification	IEC 61169-52	MIL-STD-348A MIL-C-39012
Mating Cycles	500	500
Hex Size	-	-
Mating Torque	-	-
Coupling Proof Torque, Min	-	-

Material Specifications

Description	Connector 1		Connector2	
	Material	Plating	Material	Plating
Type	MMCX Female	-	SMA Female	-
Contact	Beryllium Copper	Gold	Beryllium Copper	Gold
Insulation	PTFE	-	PTFE	-
Outer Conductor	Brass	Gold	Brass	Gold
Body	Brass	Gold	Brass	Gold
Gasket	-	-	-	-
Coupling Nut	-	-	-	-

Environmental Specifications
Temperature

Operating Range -60 to +165 deg C



Compliance Certifications

- RoHS Compliant Yes

Plotted and Other Data

Notes :

MMCX Female to SMA Female Adapter
RF Adapters Technical Data Sheet
MX-020

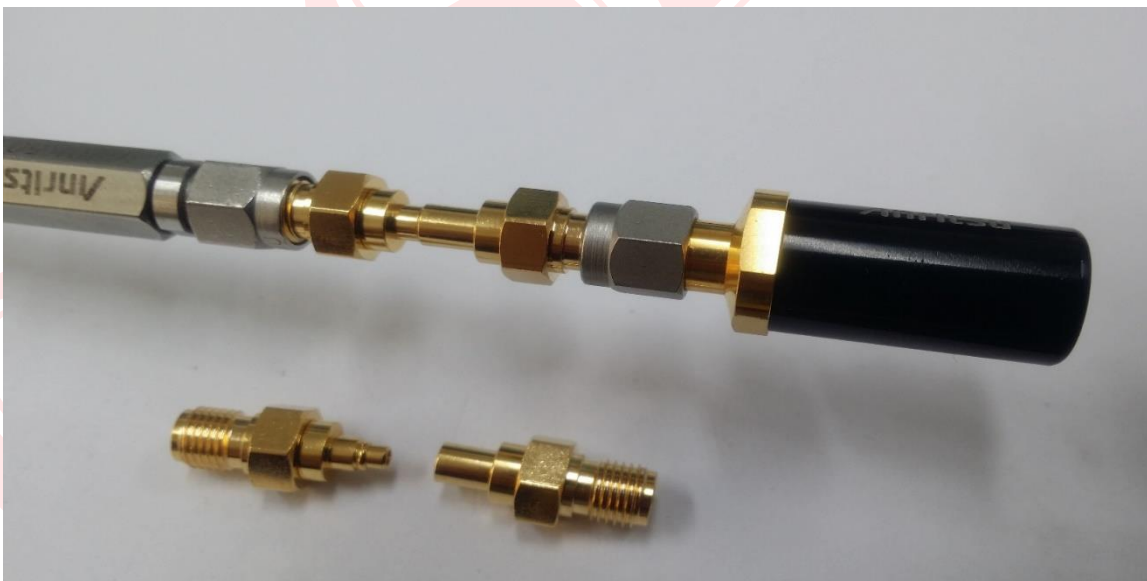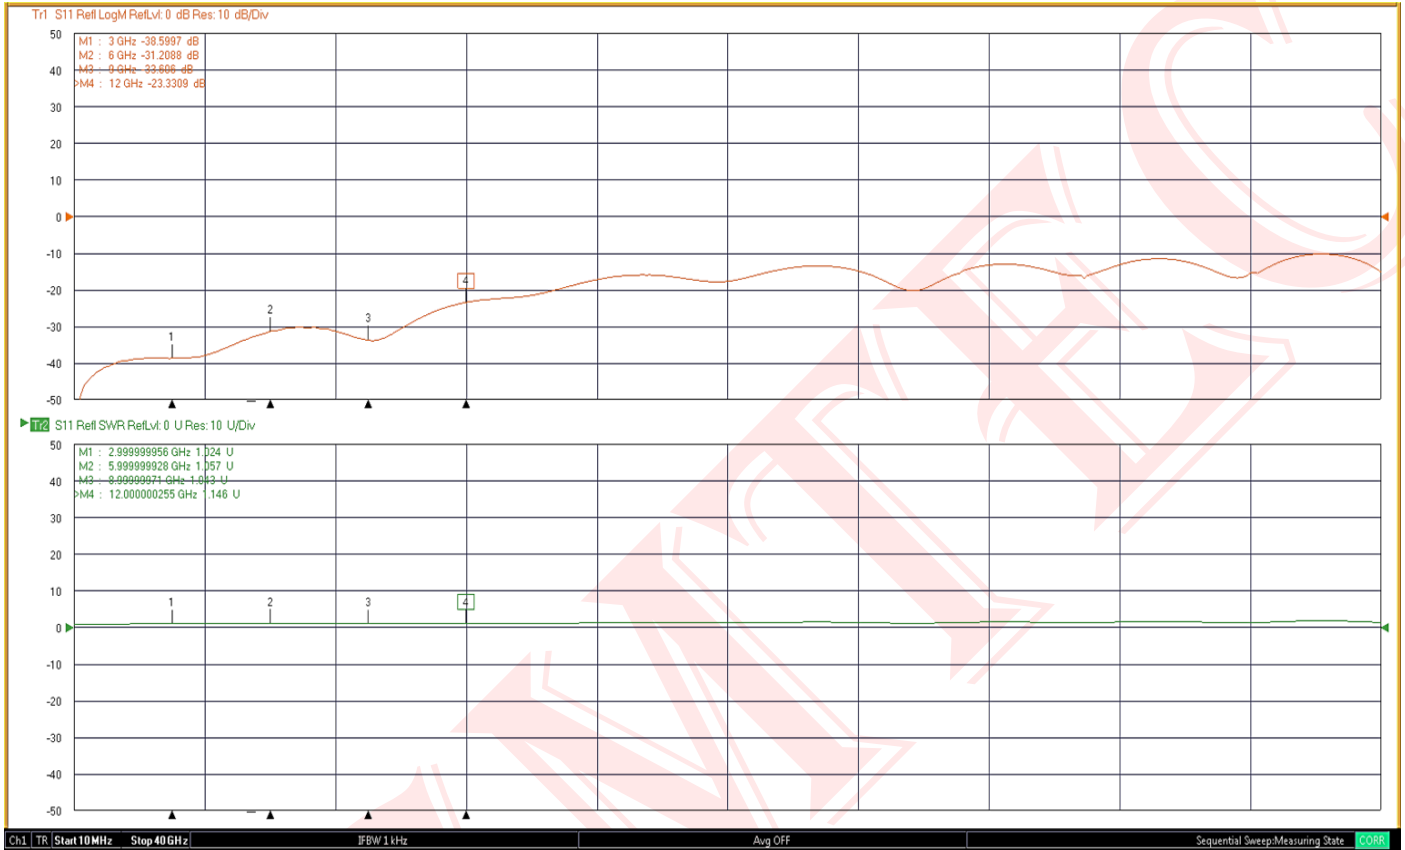

Notes :

This testing data report is both MX-020 and MX-021 combined for testing. The value is included two connectors of MX-020 and MX-021.

MMCX Female to SMA Female Adapter
RF Adapters Technical Data Sheet
MX-020

