

SMA Male Crimp For 1.37 Coaxial Cable
RF Connector Technical Data Sheet
S-001-1.37-DC

Configuration

- SMA Male Connector
- 50 Ohms
- 1.37 Coaxial Cable

Features

- Max VSWR of 1.25 : 1 up to 6 GHz
- SMA Interface compliant with MIL-STD-348A

Applications

- General Purpose Test

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR		1.15 : 1	1.25 : 1	
Operating Voltage(AC)			500	Vrms
Inner Conductor DC Resistance			3	mOhms
Outer Conductor DC Resistance			2	mOhms
Insertion Resistance	5,000			mOhms

Mechanical Specifications
Size

Length	[mm]	14.7
Width	[mm]	8.0
Height	[mm]	8.0
Weight	[g]	2.7



SMA Male Crimp For 1.37 Coaxial Cable
RF Connector Technical Data Sheet
S-001-1.37-DC

Description	Connector
Type	SMA Male
Polarity	Standard
Interface Specification	MIL-STD-348A MIL-C-39012
Mating Cycles	500
Hex Size	
Mating Torque	
Coupling Proof Torque, Min	

Material Specifications

Connector 1		
Description	Material	Plating
Type	SMA Male	-
Contact	Brass	Gold
Insulation	PTFE	-
Outer Conductor	-	-
Body	Brass	Gold
Gasket	Silicone	-
Coupling Nut	Brass	Gold

Environmental Specifications
Temperature

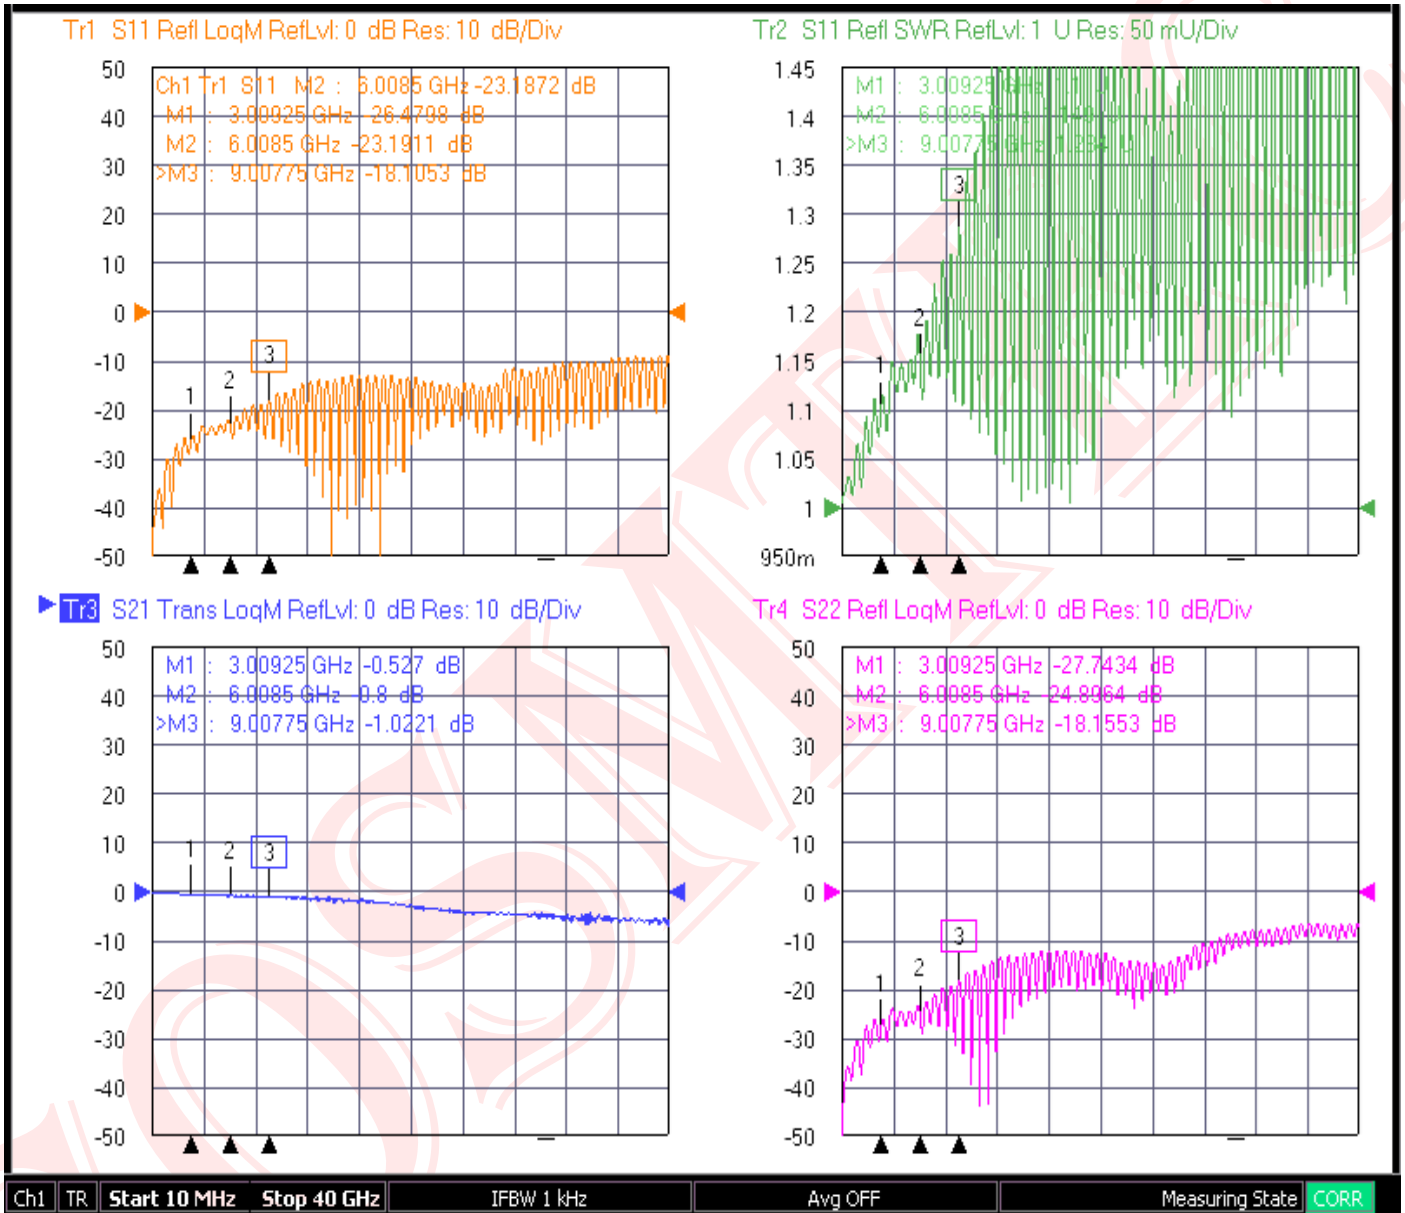
Operating Range -50 to +125 deg C

Compliance Certifications

- RoHS Compliant Yes

Plotted and Other Data

Notes : We Can Modifications of Existing Designs & Cable Assembly length

SMA Male + 1.37 Coaxial Cable + SMA Male L: 20CM
Cable Assembly Technical Data Sheet
S001DC-S001DC-1.37-20CM

Notes:

Cable Assembly length & Link with Connector Type Can following Customer's Demand.

SMA Male + 1.37 Coaxial Cable + SMA Male L: 20CM
Cable Assembly Technical Data Sheet
S001DC-S001DC-1.37-20CM
