

SMA Male Solder for RG-402, SS402 & .141 Coaxial Cable
RF Connector Technical Data Sheet
S-050-A-402

Configuration

- SMA Male Connectr
- Straight Body
- 50 Ohms

Features

- Max VSWR of 1.3 : 1 up to 18 GHz
- SMA Interface compliant with MIL-STD-348A

Applications

- General Purpose Test

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
VSWR			1.3 : 1	
Operating Voltagr(AC)			335	Vrms

Mechanical Specifications
Size


Length	[mm]	18.2
Width	[mm]	8.0
Weight	[g]	6.0



SMA Male Solder for RG-402, SS402 & .141 Coaxial Cable

RF Connector Technical Data Sheet

S-050-A-402

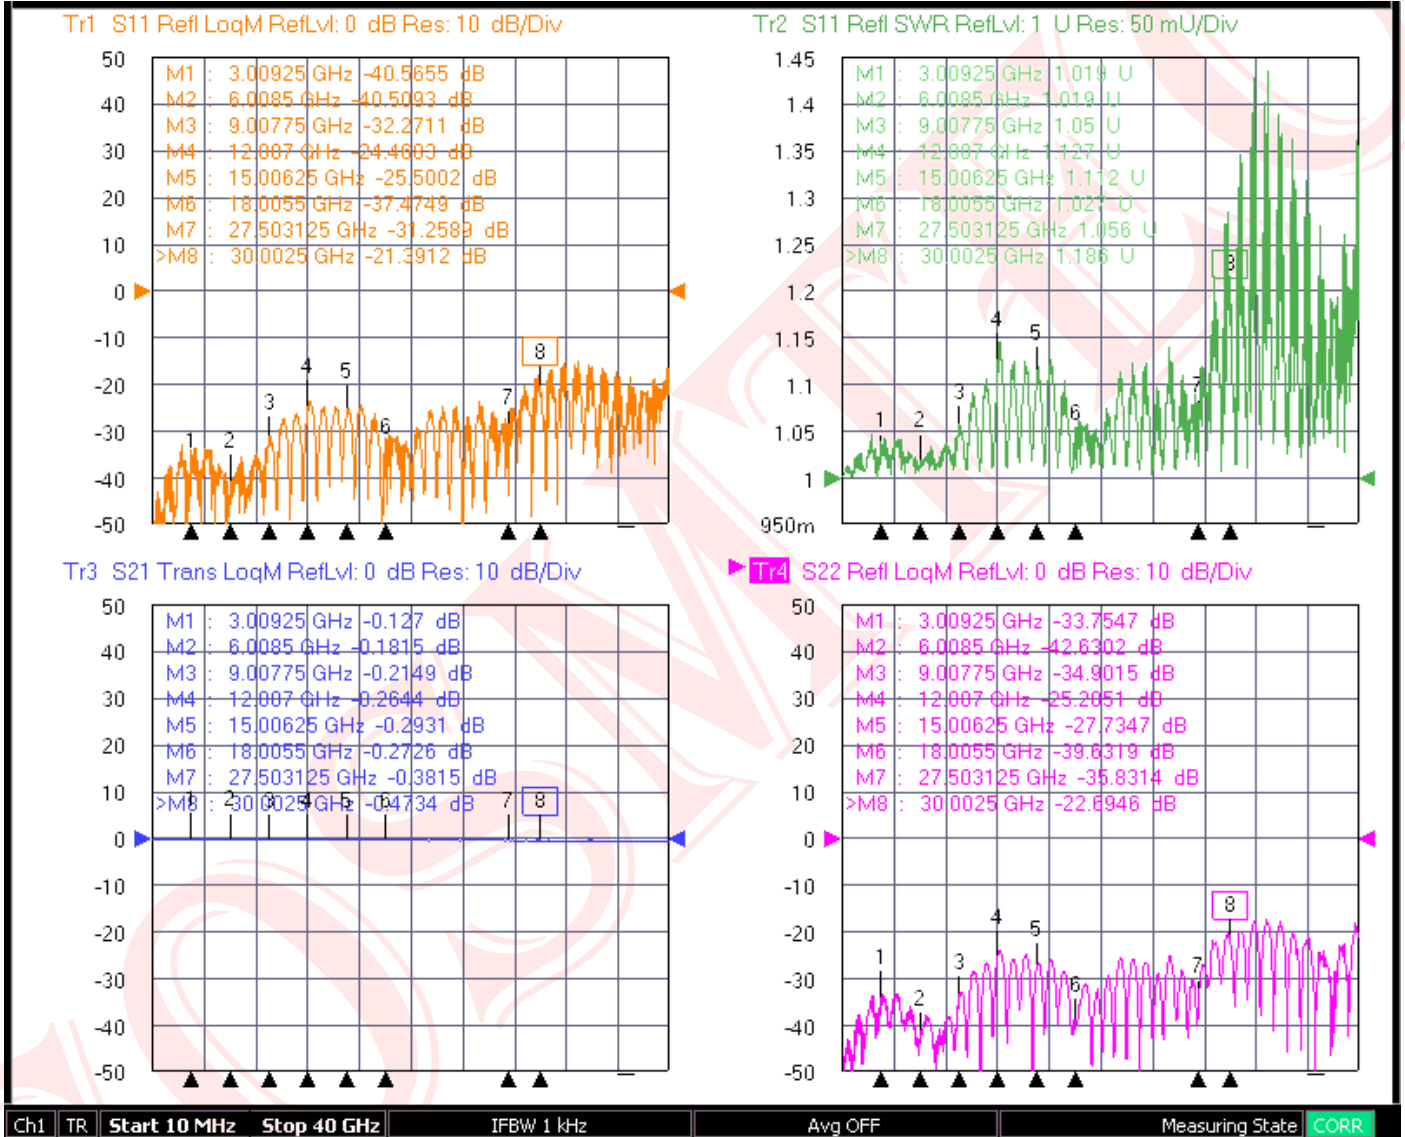

SMA Male Solder for RG-402, SS402 & .141 Coaxial Cable
RF Connector Technical Data Sheet
S-050-A-402

