

SMC Male Crimp for RG-174, RG-316, RG-188, LMR100
RF Connector Technical Data Sheet
SC-001-316

Configuration

- SMC Male Connectr
- Straight Body
- 50 Ohms

Features

- Max VSWR of 1.3 : 1 up to 3 GHz
- SMC Interface compliant with MIL-STD-348A

Applications

- General Purpose Test

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
VSWR			1.3 : 1	
Operating Voltagr(AC)			335	Vrms



Mechanical Specifications

Size

Length	[mm]	16.6
Width	[mm]	6.5
Weight	[g]	3.5



SMC Male Crimp for RG-174, RG-316, RG-188, LMR100
RF Connector Technical Data Sheet
SC-001-316

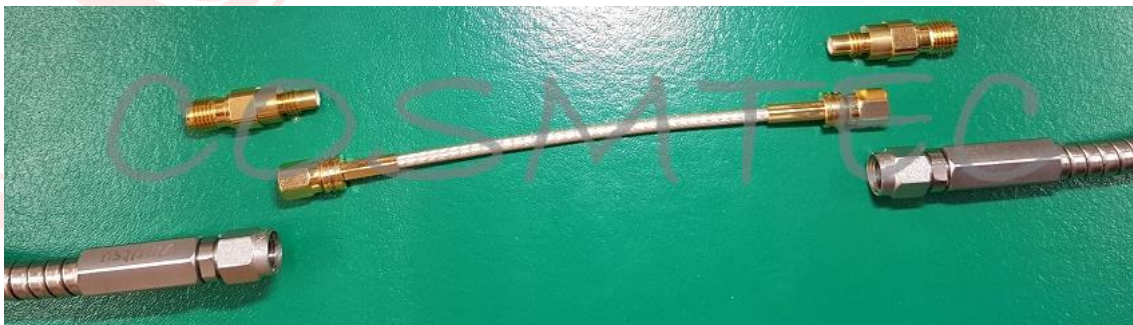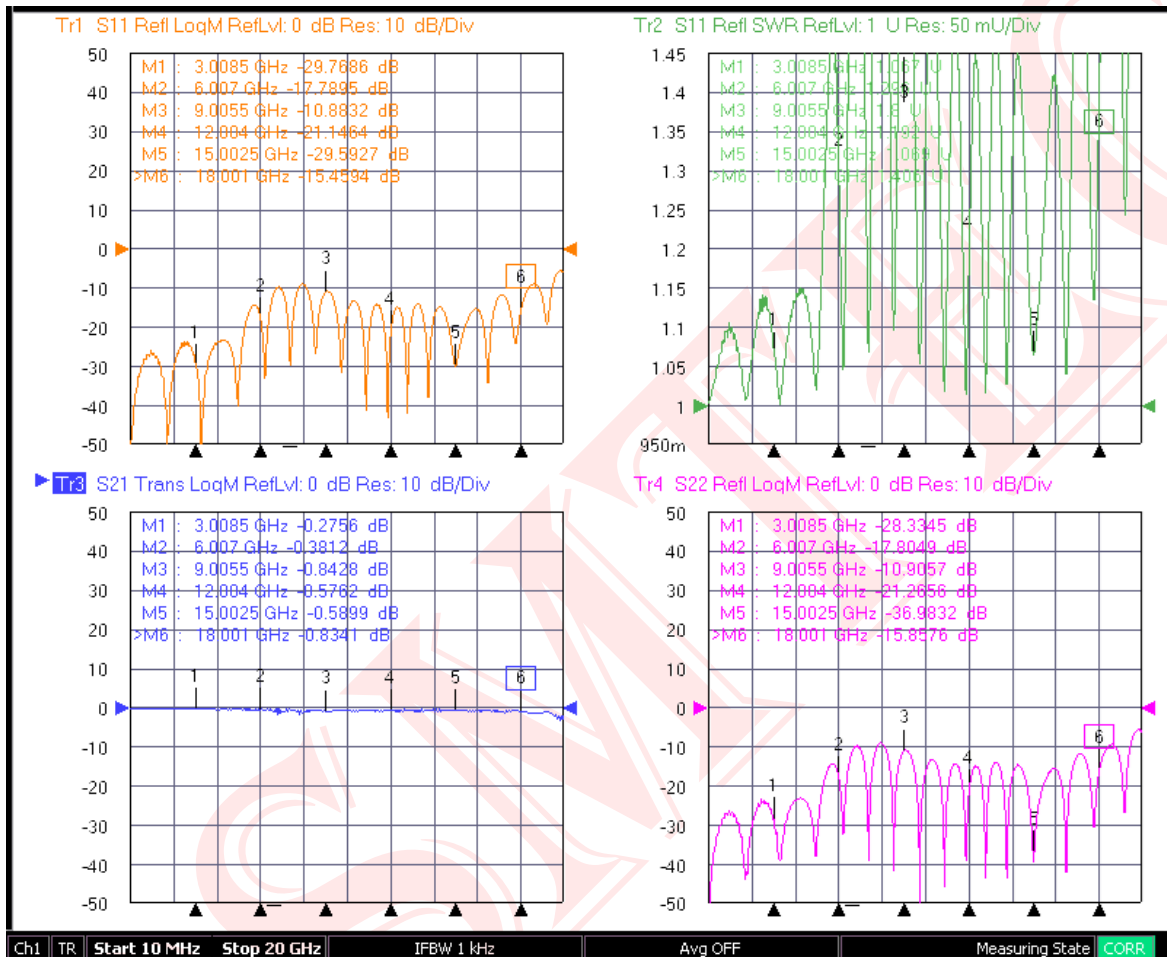

Notes :

This testing data report is SC-041 + [SC-001+RG316+SC-001 L: 10cm] + SC-041 combined for testing. The value is included two adapters & cable assembly of SC-041 + [SC-001+RG316+SC-001 L: 10cm] + SC-041

SMC Male Crimp for RG-174, RG-316, RG-188, LMR100
RF Connector Technical Data Sheet
SC-001-316

