


NO	Description	Material	Finish
1	Body	Brass	Nickel
2	Shell	Brass	Nickel
3	Ground	Brass	Nickel
4	Insulator	Teflon	-
5	Contactors	Brass	Gold
6	Snap Ring	stainless	-
7	Gasket	Silicone	-
8	Ferrule	Brass	Nickel

Dimensions Are in Millimeters
Unless Otherwise Specified
Tolerances

0.5-6	= ± 0.2
6-30	= ± 0.4
30-120	= ± 0.6
120-315	= ± 1.0
315-1000	= ± 1.6
1000-2000	= ± 2.4

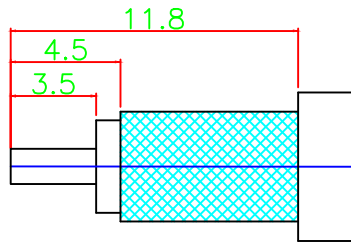

1	Impedance	50Ω
2	Frequency	DC~6 GHz
3	V.S.W.R	1.25 Max
4	Working Voltage	1,400V
5	Insulation Resistance	5000 MΩ Min
6	Contact Resistance	Center contact ≤ 2.0mΩ Outer contact ≤ 0.5mΩ
7	Temperature Range	-55°C ~ +165°C
8	Mating	Screw-On
10	Material/Finish	All RoHS Compliant



COSMTEC RESOURCES CO., LTD

DRAFT CHECKED APPROVED

The Drawing Contains Information That Is Proprietary To Cosmtec Resources Co., Ltd
And Should Not Be Used Without Written Permission. www.cosmtec.com

Part No. N-004-1-240

Title: N PLUG CRIMP FOR LMR240 CABLE

DATE: FEB/22/2021 SCALE: 1:1 UNIT m/m REV A