


NO	Items	Specs
1	Impedance	50Ω
2	Frequency	DC~6GHz
3	V.S.W.R	-
4	PIM	-
4	Working Voltage	500V
5	Dielectric Withstanding Voltage	2300V
6	Insulation Resistance	5000 MΩ Min
7	Contact Resistance	Center contact 0.4mΩ Max. Outer contact 0.2mΩ Max.
8	Temperture Range	-55°C ~ +165°C
9	Mating	Screw-On / 500 Cycles
10	Material/Finish	All RoHS Compliant

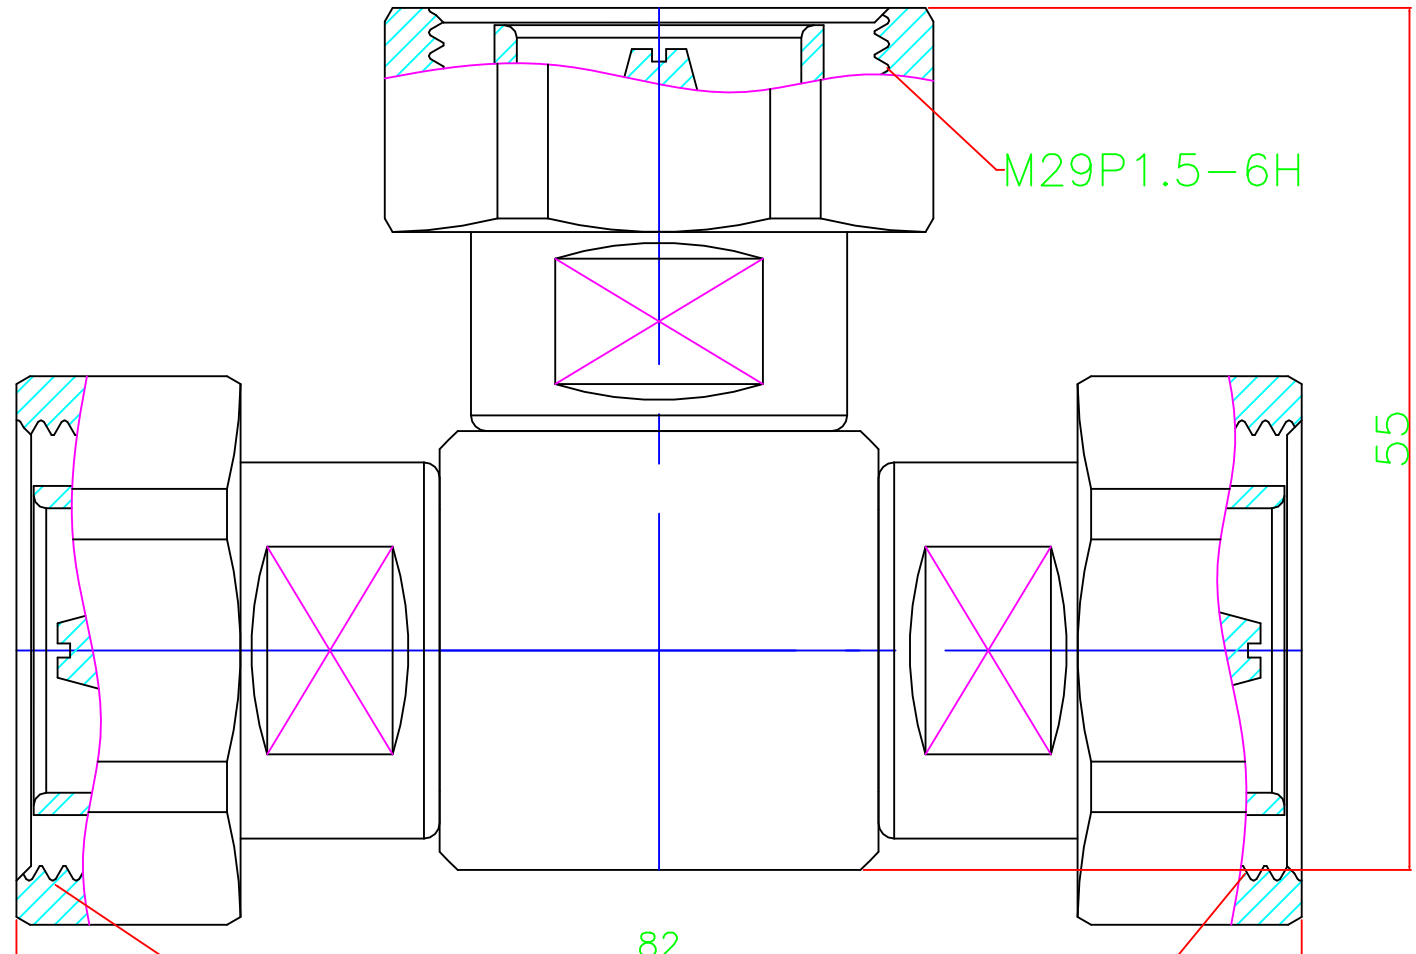

NO	Description	Material	Finish
1	Body	Brass	CuSnZn
2	Shell	Brass	CuSnZn
3	Body	Brass	CuSnZn
4	Shell	Brass	CuSnZn
5	SQ. Body	Brass	CuSnZn
6	Body	Brass	CuSnZn
7	Shell	Brass	CuSnZn
8	Contact	Brass	CuSnZn
9	Insulator	Teflon	-
10	Contact	Brass	CuSnZn
11	Insulator	Teflon	-
12	Contact	Brass	CuSnZn
13	Insulator	Teflon	-
14	Contact	Brass	CuSnZn
15	Cover Nut	Brass	CuSnZn
16	Gasket	Silicone	-
17	Gasket	Silicone	-
18	Gasket	Silicone	-

Dimensions Are In Millimeters
Unless Otherwise Specified
Tolerances

0.5-6 = ± 0.2
6-30 = ± 0.4
30-120 = ± 0.6
120-315 = ± 1.0
315-1000 = ± 1.6
1000-2000 = ± 2.4

ROHS COMPLIANT

COSMTEC COSMTEC RESOURCES CO.,LTD

DRAFT	CHECKED	APPROVED
-------	---------	----------

The Drawing Contans Information That Is Proprietary To Cosmtec Resources Co., Ltd
And Should Not Be Used Without Written Permission. www.cosmtec.com

Part No. DN-047

Title: 7-16 DIN PLUG TO PLUG TO PLUG T-TYPE ADAPTER

DATE: FEB/18/2022	SCALE: 1:1	UNIT: m/m	REV: A
-------------------	------------	-----------	--------