




NO	Items	Specs
1	Impedance	50Ω
2	Frequency	DC~6GHz
3	V.S.W.R	1.3 Max
4	PIM	-155dBc Max.
4	Working Voltage	500V
5	Dielectric Withstanding Voltage	1500V
6	Insulation Resistance	3000 MΩ Min
7	Contact Resistance	Center contact ≤ 2mΩ Outer contact ≤ 1mΩ
8	Temperture Range	-55°C ~ +165°C
9	Mating	Screw-On / 500 Cycles
10	Material/Finish	All RoHS Compliant

NO	Description	Material	Finish
1	Body	Brass	CuSnZn
2	Shell	Brass	CuSnZn
3	Contact	Brass	CuSnZn
4	Insulator	Teflon	—
5	Snap Ring	SUS304	—
6	Gasket	Silicone	—

Dimensions Are In Millimeters
Unless Otherwise Specified
Tolerances

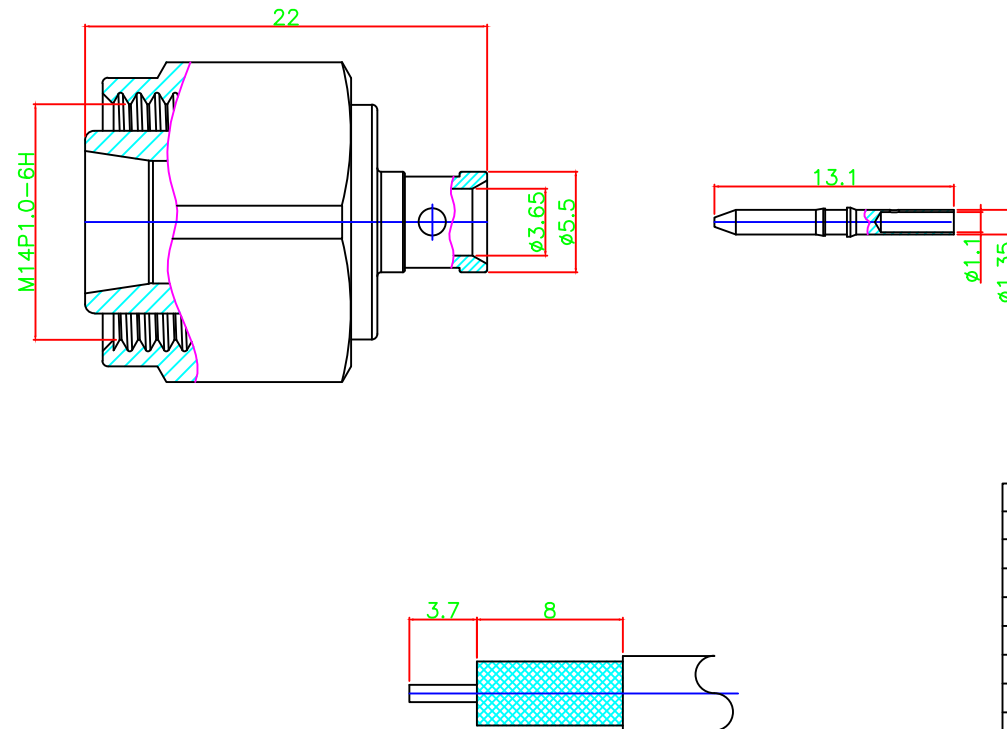

0.5-6 = ± 0.2
6-30 = ± 0.4
30-120 = ± 0.6
120-315 = ± 1.0
315-1000 = ± 1.6
1000-2000 = ± 2.4



COSMTEC RESOURCES CO.,LTD

DRAFT	CHECKED	APPROVED
The Drawing Contans Information That Is Proprietary To Cosmttec Resources Co., Ltd And Should Not Be Used Without Written Permission. www.cosmttec.com		

Part No.	MMN-003-402		
Title:	2.2-5 PLUG SOLDR FOR RG-402 CABLE		
DATE:	OCT/17/2022	SCALE:	1:1
UNIT	m/m	REV	A