


NO	Items	Specs
1	Impedance	50Ω
2	Frequency	DC~6GHz
3	V.S.W.R	1.2 Max
4	Working Voltage	500V
5	Dielectric Withstanding Voltage	AC 1500V
6	Insulation Resistance	5000 MΩ Min
7	Contact Resistance	Center contact ≤ 3.0mΩ Outer contact ≤ 2.0mΩ
8	Temperture Range	-55°C ~ +165°C
9	Mating	Screw-On
10	Material/Finish	All RoHS Compliant

NO	Description	Material	Finish
1	Body	Brass	Gold
2	Insulator	Teflon	—
3	Contactior	P.H Bronze	Gold
4	Ferrule	Brass	Gold

Dimensions Are in Millimeters
Unless Otherwise Specified
Tolerances

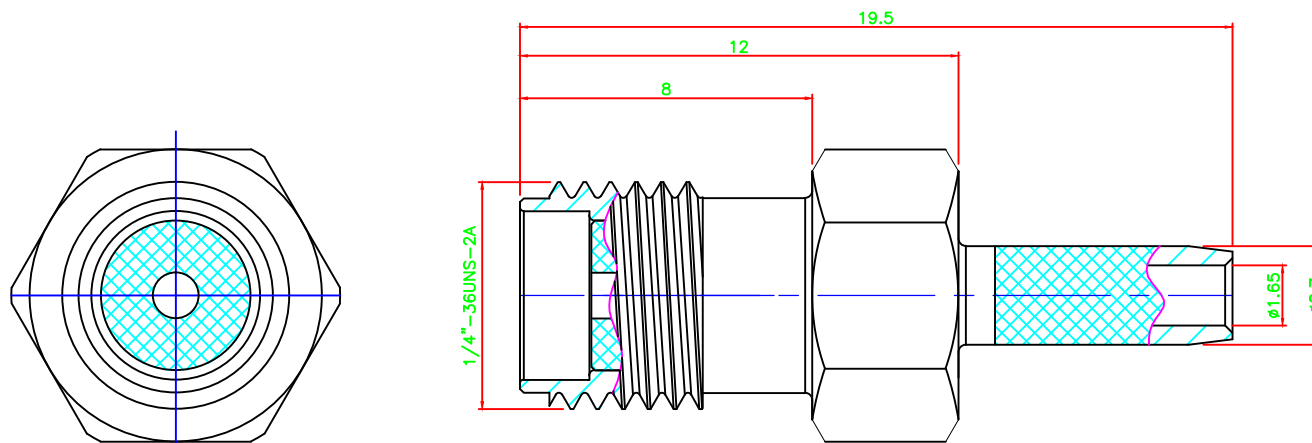

0.5-6 = ± 0.2
6-30 = ± 0.4
30-120 = ± 0.6
120-315 = ± 1.0
315-1000 = ± 1.6
1000-2000 = ± 2.4



COSMTEC RESOURCES CO.,LTD

DRAFT

CHECKED

APPROVED

The Drawing Contans Information That Is Proprietary To Cosmtec Resources Co., Ltd
And Should Not Be Used Without Written Permission. www.cosmtec.com

Part No.	S-002-174
Title:	SMA JACK CRIMP FOR RG-174/RG-316, LMR100
DATE:	SEP/02/2022
SCALE:	1:1
UNIT	m/m
REV	B