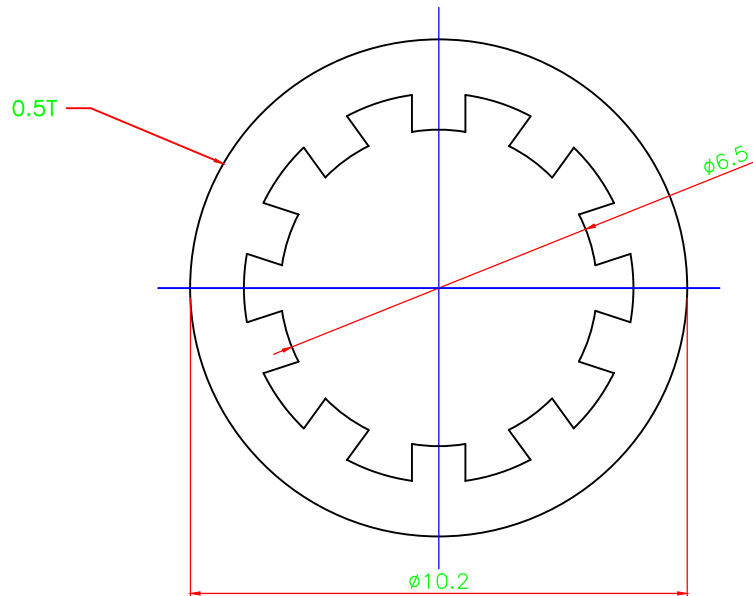
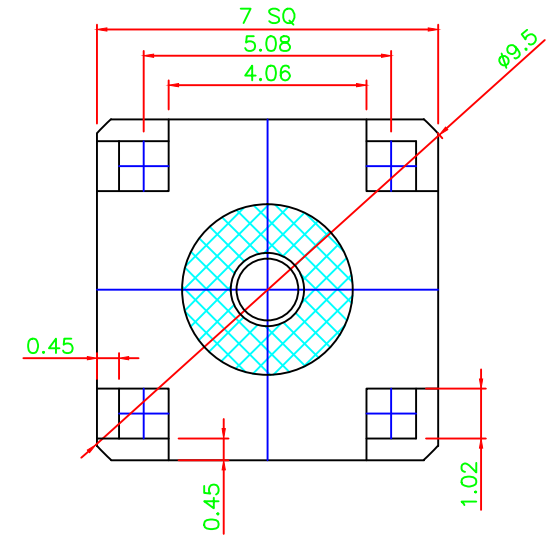
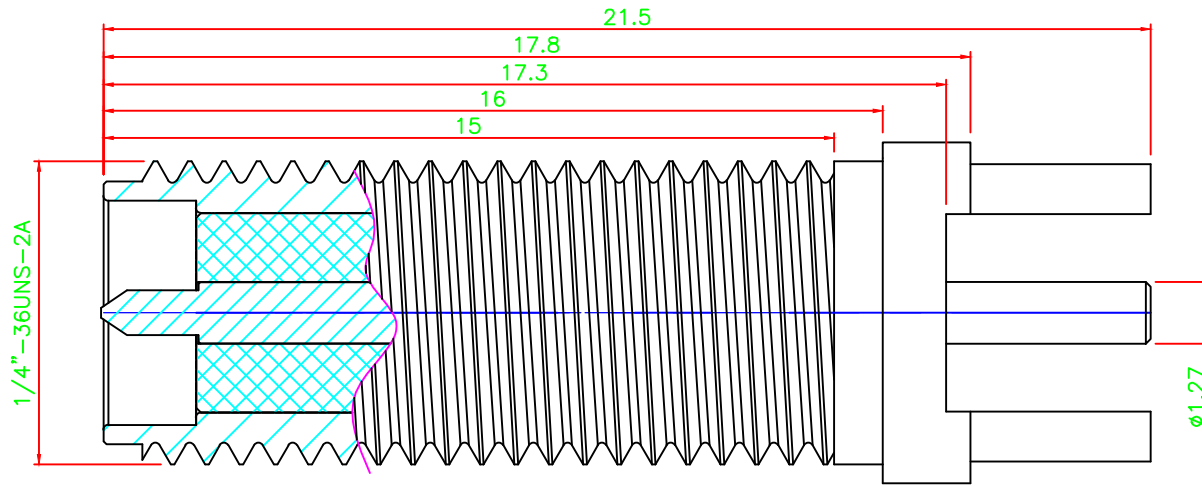


NO	Items	Specs
1	Impedance	50Ω
2	Frequency	DC~18GHz
3	V.S.W.R	1.25 Max
4	Working Voltage	500V
5	Dielectric Withstanding Voltage	AC 1500V
6	Insulation Resistance	5000 MΩ Min
7	Contact Resistance	Center contact ≤ 3.0mΩ Outer contact ≤ 2.0mΩ
8	Temperature Range	-55°C ~ +165°C
9	Mating	Screw-On
10	Durability	500 Matings
11	Material/Finish	All RoHS Compliant

NO	Description	Material	Finish
1	Body	Brass	Gold
2	Contact	Brass	Gold
3	Insulator	Teflon	-
4	Nut	Brass	Gold
5	Washer	Brass	Gold

Dimensions Are In Millimeters
Unless Otherwise Specified
Tolerances

ROHS
COMPLIANT

0.5-6 = ± 0.2
6-30 = ± 0.4
30-120 = ± 0.6
120-315 = ± 1.0
315-1000 = ± 1.6
1000-2000 = ± 2.4



COSMTEC RESOURCES CO., LTD

DRAFT

CHECKED

APPROVED

The Drawing Contains Information That Is Proprietary To Cosmtec Resources Co., Ltd
And Should Not Be Used Without Written Permission.
Specifications are subject to change without prior notice. Cosmtec Resource Co., Ltd
All Rights Reserved, E & OE
www.cosmtec.com

Part No.

S-036-10-RP

Title:

SMA JACK SOLDER
RP FOR PCB T.G.G.
(LONG THREAD)

DATE:

MAY/03/2017

SCALE:

1:1

UNIT

m/m

REV

A