

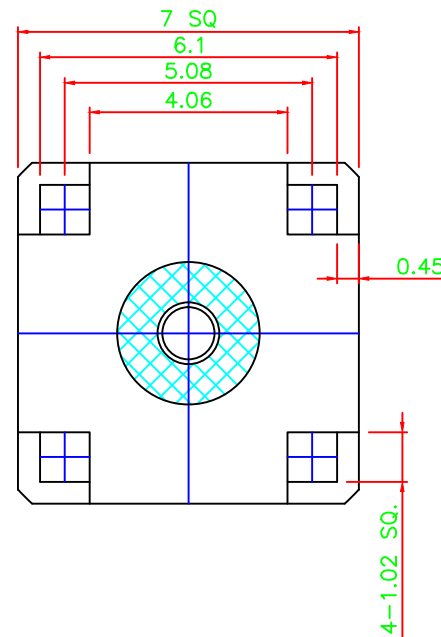
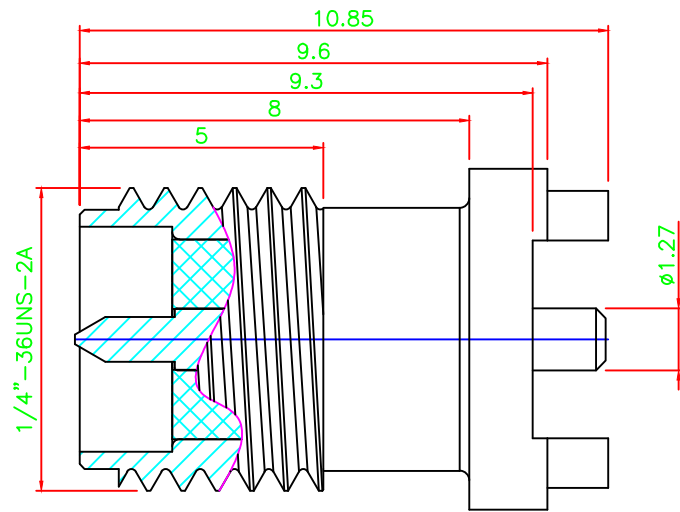


NO	Items	Specs
1	Impedance	50Ω
2	Frequency	DC~18GHz
3	V.S.W.R	1.3 Max
4	Working Voltage	500V
5	Dielectric Withstanding Voltage	AC 1500V
6	Insulation Resistance	5000 MΩ Min
7	Contact Resistance	Center contact ≤ 3.0mΩ
		Outer contact ≤ 2.0mΩ
8	Temperture Range	-55°C ~ +165°C

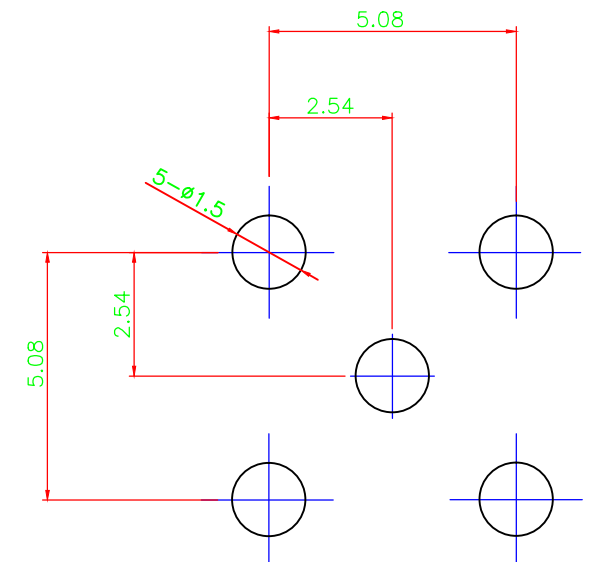

RECOMMENDED PCB LAYOUT



				Dimensions Are In Millimeters Unless Otherwise Specified Tolerances			0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1.0 315-1000 = ± 1.6 1000-2000 = ± 2.4			 COSMTEC RESOURCES CO.,LTD			Part No. S-036-19-RP		
NO	Description	Material	Finish		DRAFT	CHECKED	APPROVED	Title: SMA JACK RP SOLER FOR PCB MOUNT							
1	Body	Brass	Gold		The Drawing Contans Information That Is Proprietary To Cosmtec Resources Co., Ltd And Should Not Be Used Without Written Permission.			DATE:	SCALE:	UNIT	REV				
2	Contactor	Brass	Gold		www.cosmtec.com			AUG/05/2020	1:1	m/m	A				
3	Insulator	Teflon	—												