
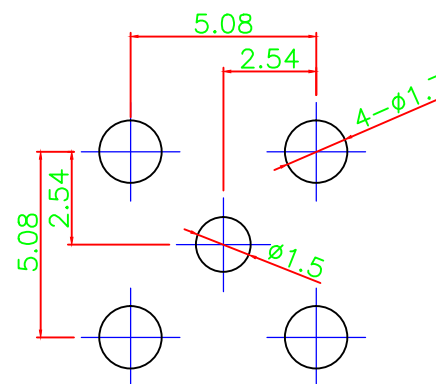
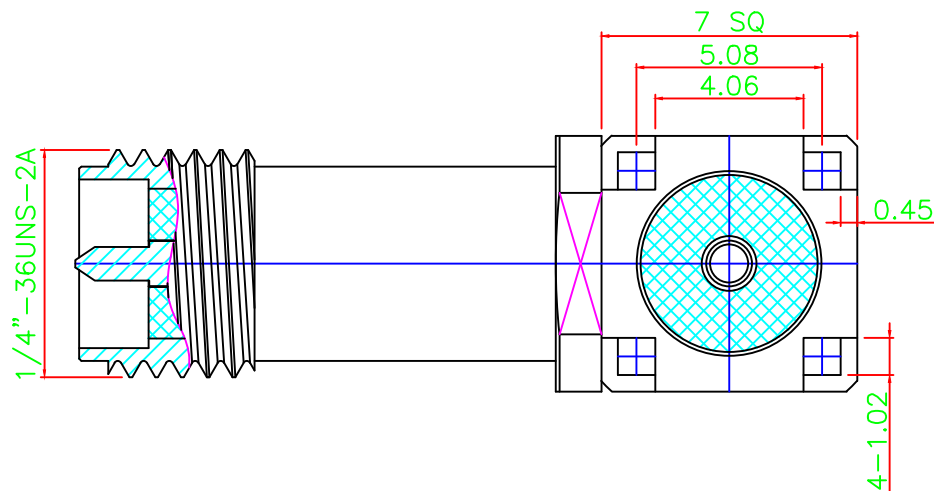
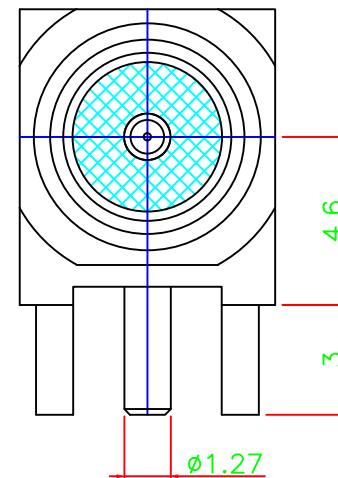


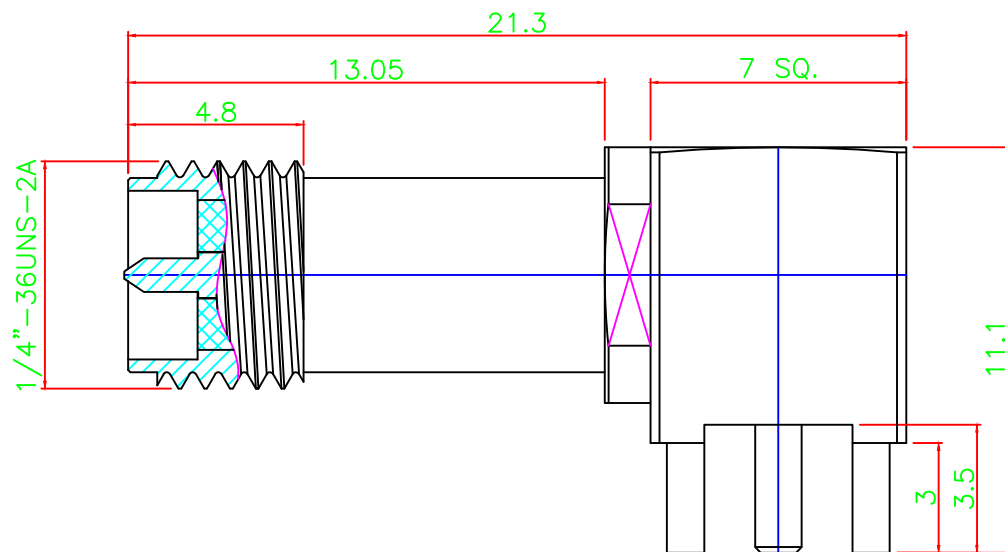

RECOMMENDED
MOUNTING HOLES


NO	Items	Specs
1	Impedance	50Ω
2	Frequency	DC~12.5 GHz
3	V.S.W.R	1.3 Max
4	Working Voltage	500V
5	Dielectric Withstanding Voltage	AC 1500V
6	Insulation Resistance	5000 MΩ Min
7	Contact Resistance	Center contact ≤ 3.0mΩ Outer contact ≤ 2.0mΩ
8	Temperture Range	-55°C ~ +165°C
9	Mating	Screw-On
10	Material/Finish	All RoHS Compliant

NO	Description	Material	Finish
1	Body	Brass	Gold
2	Insulator	Teflon	-
3	S.Q Body	Brass	Gold
4	Contactior	Brass	Gold
5	Insulator	Teflon	-

Dimensions Are in Millimeters
Unless Otherwise Specified
Tolerances



0.5-6 = ± 0.2
6-30 = ± 0.4
30-120 = ± 0.6
120-315 = ± 1.0
315-1000 = ± 1.6
1000-2000 = ± 2.4



COSMTEC RESOURCES CO.,LTD

DRAFT

CHECKED

APPROVED

The Drawing Contans Information That Is Proprietary To Cosmtec Resources Co., Ltd
And Should Not Be Used Without Written Permission. www.cosmtec.com

Part No.	S-037-11-RP
Title:	SMA JACK SOLDER R/P RIGHT ANGLE FOR PCB
DATE:	JUN/29/2020
SCALE:	1:1
UNIT	m/m
REV	A