

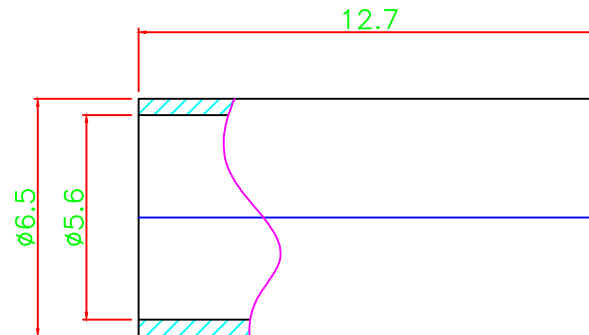


NO	Description	Material	Finish
1	Body	Brass	Nickel
2	Shell	Brass	Nickel
3	Insulator	Teflon	—
4	Contacter	Brass	Gold
5	Bullet pin	Brass	Gold
6	Gasket	Silicone	—
7	Snap Ring	SUS304	—
8	Ferrule	Brass	Nickel

Dimensions Are in Millimeters
Unless Otherwise Specified
Tolerances

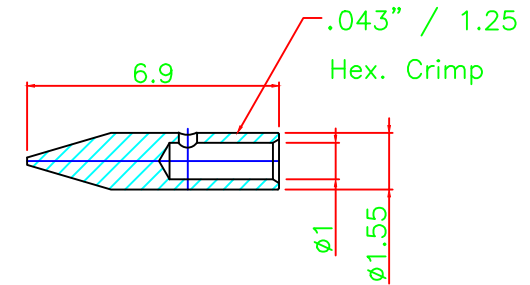

0.5–6 = ± 0.2
6–30 = ± 0.4
30–120 = ± 0.6
120–315 = ± 1.0
315–1000 = ± 1.6
1000–2000 = ± 2.4

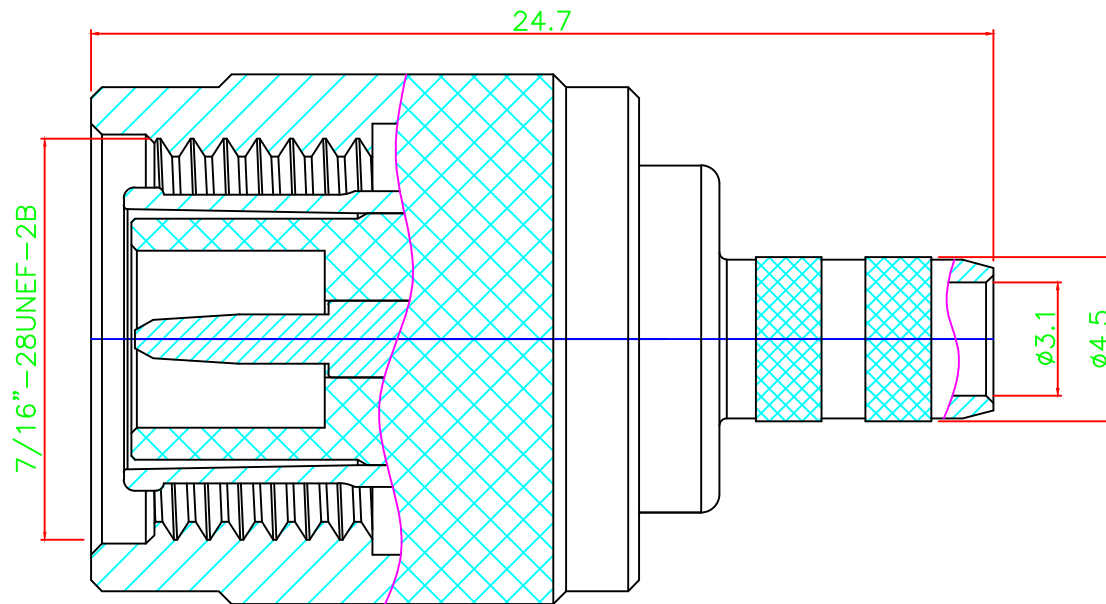

COSMTEC RESOURCES CO., LTD

DRAFT	CHECKED	APPROVED
The Drawing Contains Information That Is Proprietary To Cosmtec Resources Co., Ltd And Should Not Be Used Without Written Permission. www.cosmtec.com		

1	Impedance	50Ω
2	Frequency	DC~6 GHz
3	V.S.W.R	1.3 Max
4	Working Voltage	1,500V
5	Insulation Resistance	5000 MΩ Min
6	Contact Resistance	Center contact ≤ 1.5mΩ Outer contact ≤ 0.2mΩ
7	Temperature Range	–55°C ~ +165°C
8	Mating	Screw-On
10	Material/Finish	All RoHS Compliant

Part No.	T-004-58
Title:	TNC PLUG CRIMP FOR RG-58 (PIN-IN-PIN TYPE)
DATE:	AUG/13/2020
SCALE:	1:1
UNIT	m/m
REV	A