


NO	Description	Material	Finish
1	Body	Brass	Nickel
2	Shell	Brass	Nickel
3	Insulator	Teflon	—
4	Contact	Brass	Gold
5	Bullet pin	Brass	Gold
6	Gasket	Silicone	—
7	Snap Ring	Brass	—
8	Ferrule	Brass	Nickel

Dimensions Are in Millimeters
Unless Otherwise Specified
Tolerances



0.5–6	= ± 0.2
6–30	= ± 0.4
30–120	= ± 0.6
120–315	= ± 1.0
315–1000	= ± 1.6
1000–2000	= ± 2.4

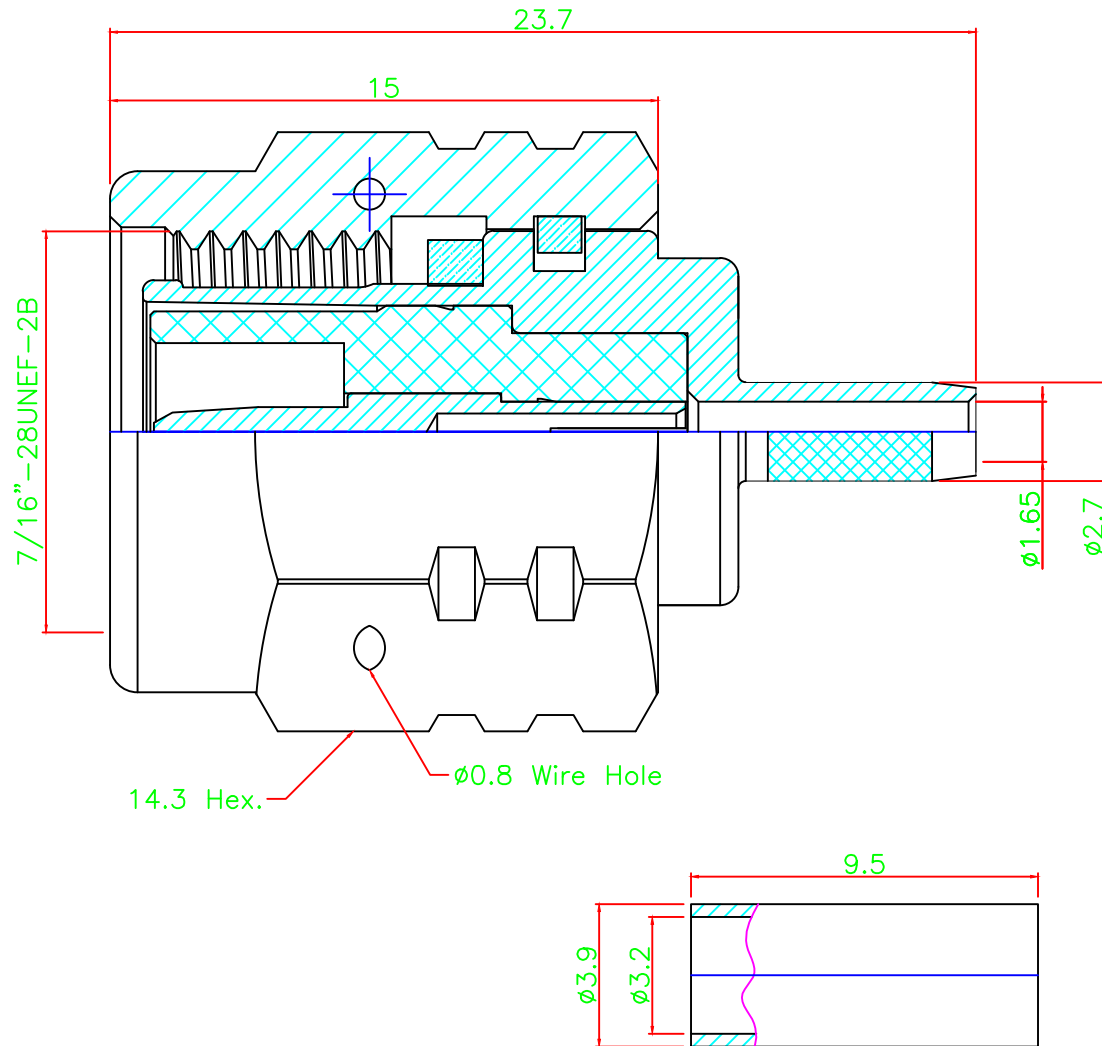

COSMTEC RESOURCES CO., LTD

DRAFT	CHECKED	APPROVED
The Drawing Contains Information That Is Proprietary To Cosmtec Resources Co., Ltd And Should Not Be Used Without Written Permission. www.cosmtec.com		

1	Impedance	50Ω
2	Frequency	DC~6 GHz
3	V.S.W.R	1.3 Max
4	Working Voltage	1,500V
5	Insulation Resistance	5000 MΩ Min
6	Contact Resistance	Center contact ≤ 1.5mΩ
		Outer contact ≤ 0.2mΩ
7	Temperature Range	–55°C ~ +165°C
8	Mating	Screw-On
10	Material/Finish	All RoHS Compliant

Part No.	T-004-H-174		
Title:	TNC PLUG CRIMP FOR RG-174/316 (PIN-IN-PIN TYPE)		
DATE:	JAN/28/2022	SCALE:	1:1
UNIT	m/m	REV	A